


Framing Specifications

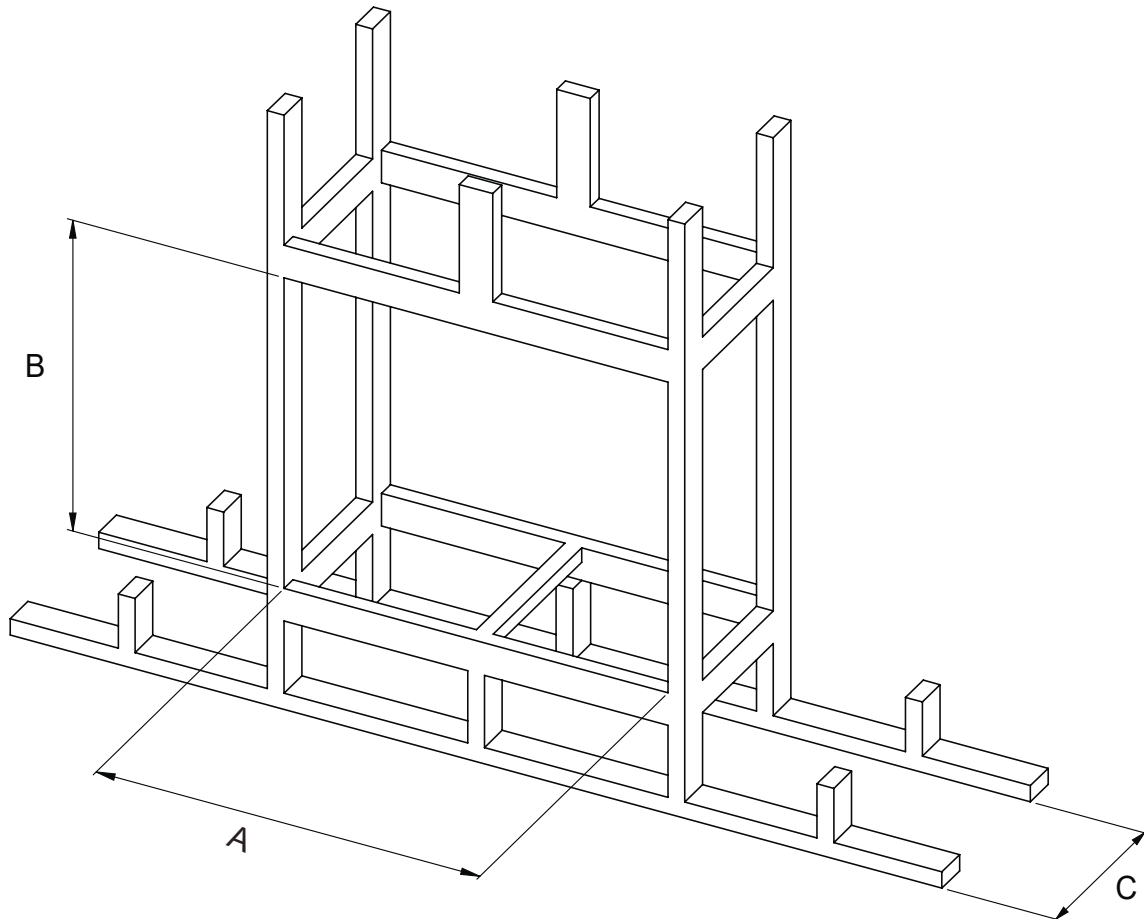


Minimum Framing Specifications			
Model	A	B	C
B36S	940mm	885mm	450mm

↑
Front of stud to front of stud

PLEASE NOTE: Frame opening height is greater than plaster opening height! Height off floor nominal.

Preparation and Framing Specifications

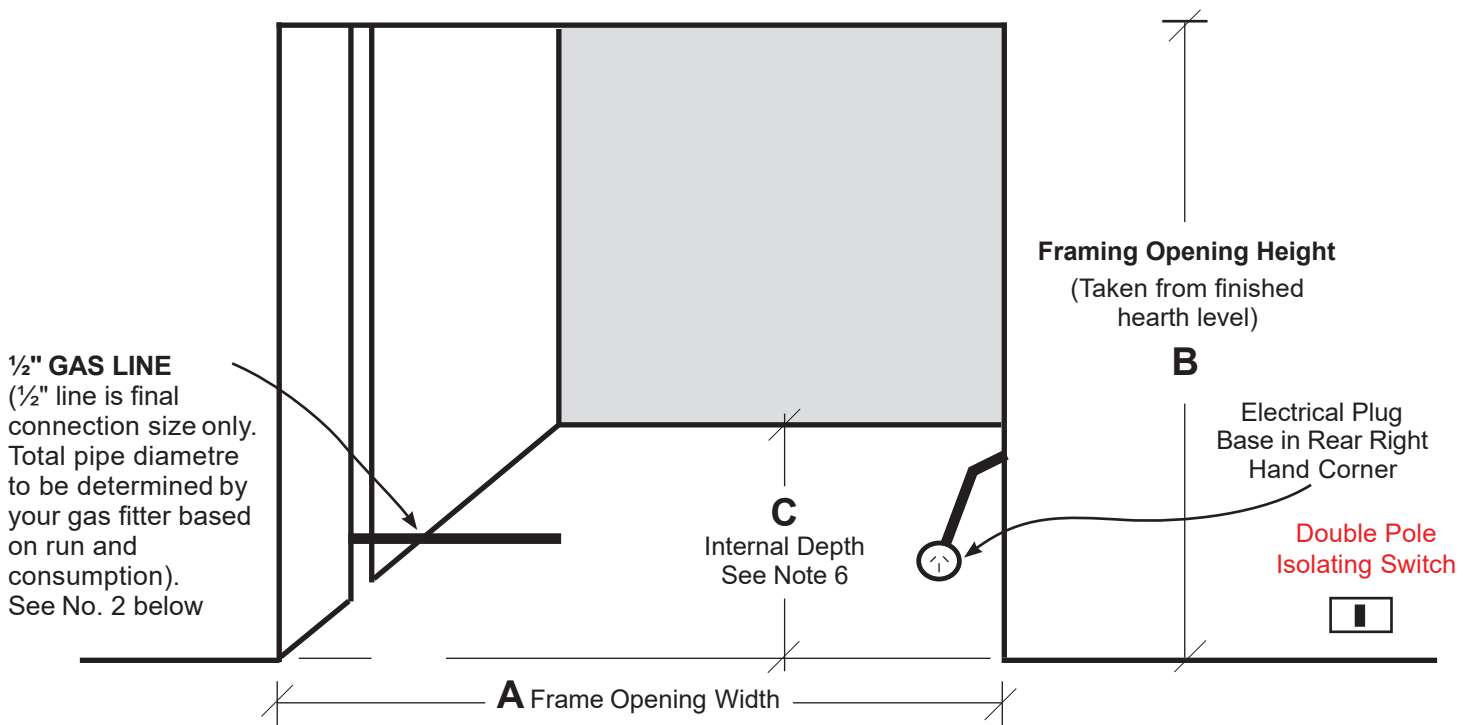

IMPORTANT NOTICE: (Items 1, 2 and 3 apply to ALL Heat & Glo gas appliances)

- 1/2" GAS LINE:** Run through cavity 50mm above finished base level, **NOT RIGID, NOT CLIPPED**, with minimum 500mm into cavity and 100mm back from stud face.
- PVC (COMPOSITE) GASLINE** must terminate minimum 500mm short of gas heater. Copper pipe **MUST** be the final connection to the gas heater.
- DOUBLE POLE ISOLATING SWITCH** to be fitted (wired to plug base) in accordance with AS5601 and AS3000. Location within 1 metre of fireplace.
- HEATER MUST BE INSTALLED AND FLUE PENETRATION COMPLETE PRIOR TO PLASTER SHEETING TO ALLOW COMPLETE CONNECTION OF THE FLUES AND TO ENSURE THAT THE 115mm TRIM OVERLAPS THE PLASTER EDGES TO COMPLETE THE INSTALLATION.**
- Framing should be of a minimum 90mm x 35mm pine.
- In order to install a rear flue termination **DIRECTLY** off the rear of the heater, the distance from the back of the heater to the outside of the external wall must not exceed 457mm.
- Combustible materials must not be used to enclose the top of the heater, when unit is set up as a free standing unit with exposed flue.

NOTE: If you have any queries relating to the above procedures, please contact Jetmaster on 1300 219 875.

Specifications subject to change, contact Jetmaster prior to commencement.

**Specifications correct at time of printing*