


**APPENDIX 1:
MINIMUM CLEARANCES FOR THE QUADRAFIRE MILLENTUM 5700 STEP TOP ACC
SOLID FUEL APPLIANCE INSTALLED WITH
A DEFAULT FLUE KIT**



The floor protector consisted of 6mm thick cement fibre sheet which had a thermal resistance of $0.8\text{m}^2\cdot\text{k}/\text{W}$.

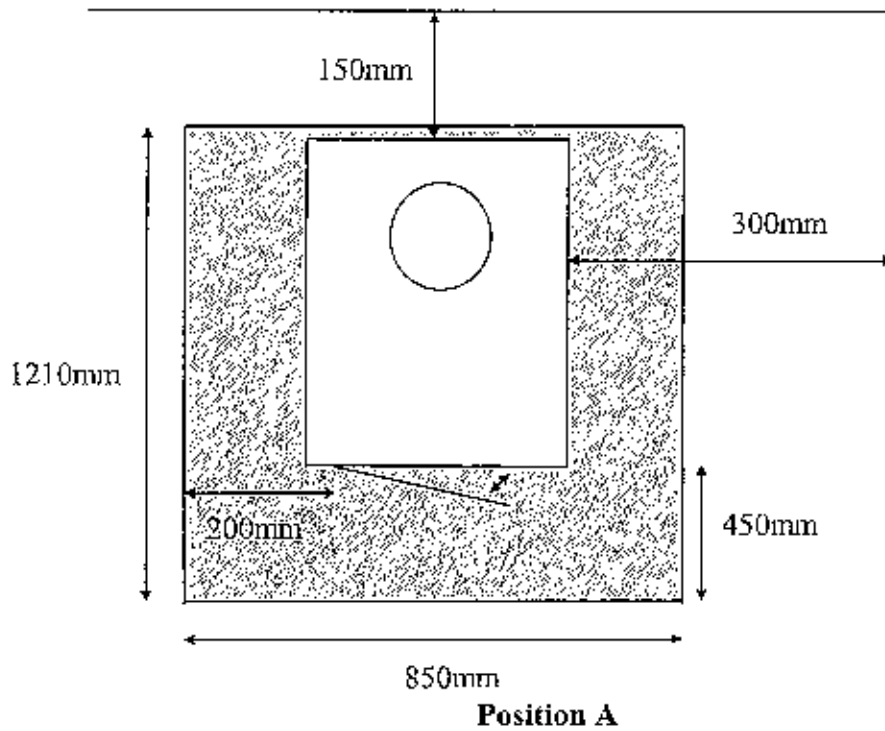